


# plug-in power supply

5 ... 10 W

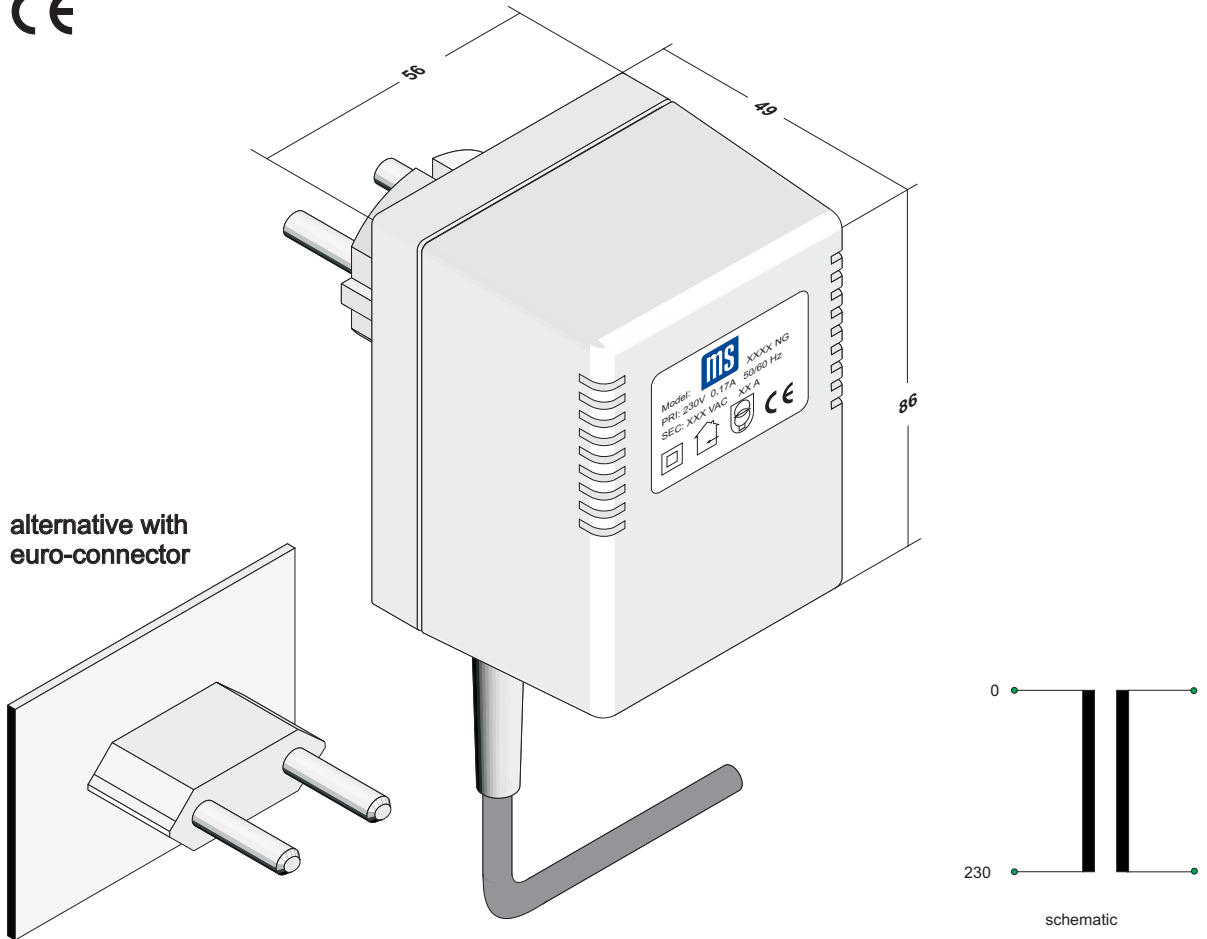

RNG	input	power / voltage / current
	230V ± 10%	10 W 24,0VDC/0,40ADC
	230V ± 10%	8 W 12,0VDC/0,67ADC
	230V ± 10%	5 W 5,0VDC/1,00ADC

## technical datas:

input-voltage/voltage-tolerance:  
or  
output-tolerance:

230 V / 50 - 60 Hz ± 10%  
other voltage on demand  
± 5%

output-ripple:  
characteristic:  
ambient temperature:  
protection-class:  
short-circuit-proof protection:  
safety standards:

max. 2,5 mV<sub>ss</sub>  
controlled, short-circuit-proof  
0 - +40°C  
II / IP00  
primary temperature-protection  
EN 60742 (VDE 0551), DIN 19240